


WAVECOM® W-CODE




W-CODE provides all functions required to classify, analyze, record, decode and process radio data communications throughout the entire radio spectrum from ELF to SHF. W-CODE is the new standard decoder software for all Wavecom products.

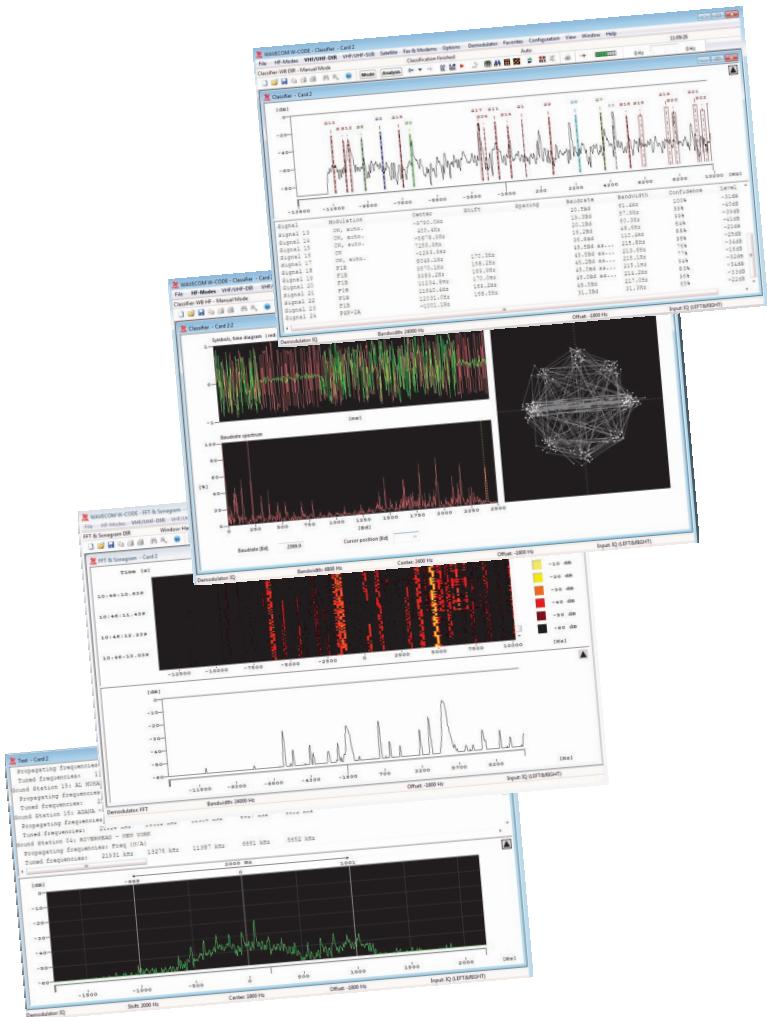

W-CODE Features and Facts

- ◆ W-CODE provides powerful signal analysis, signal processing and decoding
- ◆ Automatic classification, code check, de-modulation and decoding to content level (text, live voice and image etc.) of signals
- ◆ Signal overview using real-time FFT spectrum, waterfall displays and manual signal measurements
- ◆ Automatic code check of known signals and unknown, pre-defined signals
- ◆ Supports more than 226 HF, VHF, UHF and satellite decoder modes and protocols without additional, costly licensing
- ◆ Supports worldwide remote monitoring of radio transmissions in any frequency band, anywhere via Internet, Ethernet-LAN, Wireless-LAN or Leased Lines
- ◆ Supports W-CLOUD high-quality I/Q data streams from a remote receiver
- ◆ Supports SDR (Software Defined Radio) I/Q data or external digital input
- ◆ Supports TCP/IP input streams using IP-CONF, GEW PXGF, ANSI/VITA-49, Virtual Audio Cable (VAC), WiNRADiO digital Virtual Sound Card (VSC) and host native sound card input with sampling rates of up to 192 kHz
- ◆ Supports W-PCIe and W-PCI dual and W74PC quad internal digital down converters (DDCs) up to 87.5 MHz
- ◆ Tested with a number of SDRs, e.g. WiNRADiO G39DDC, G33DDC, GEW GRXLAN, Perseus, RFSpace products, Rohde & Schwarz and MEDAV LR2
- ◆ Supports direct input and output of WAV files from integrated, digital Wavecom Media Player/Recorder.
- ◆ Decoded output can be saved to files or transferred to an external application using the XML based Remote Control Interface
- ◆ Multi-mode feature supporting up to eight concurrent W-CODE instances

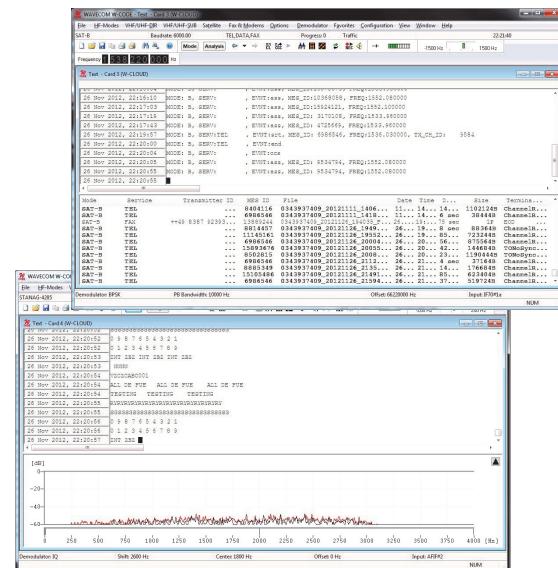


Worldwide monitoring with W-CODE and W-CLOUD


Signal Sources and Devices

The *W-CODE Device Selector* supports a great number of input interfaces and devices, e.g. IF I/Q streams produced by many receivers, Virtual Audio Cables (VAC), TCP/IP interfaces, W-CLOUD I/Q streams and the DDC signals of W-PCIe, W-PCI and W74PC. The number of supported interfaces is continuously growing. Using W-CODE prevents the locking to proprietary devices of software producers.

Today there is a demand for wideband storage which is met by directly connecting SDRs to low-cost hard disks. WiNRADiO G33DDC and G39DDC will for instance store bandwidths up to 4 MHz. W-CODE offers storage of narrow bandwidth I/Q streams up to 96 kHz using its native Media Player/Recorder. Expensive external and exotic recording devices belong to the past.

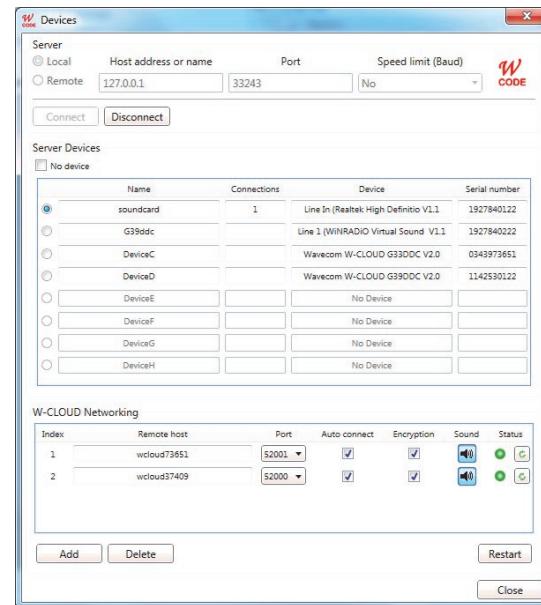

Quick and easy signal source settings

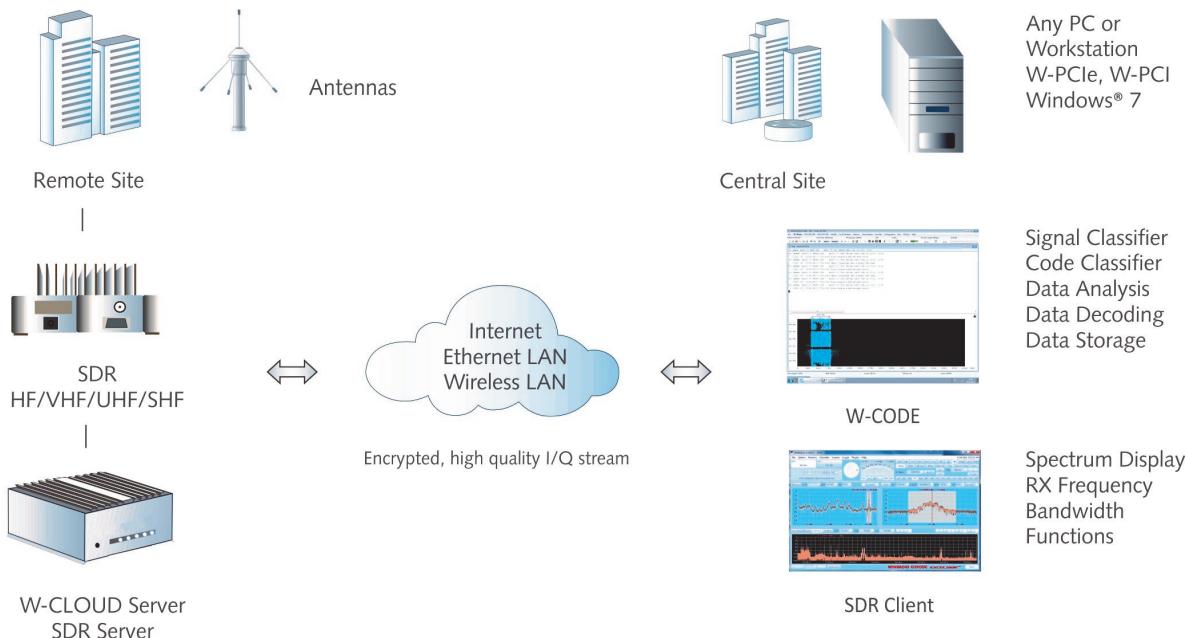


Example setup for remote signal acquisition using W-CLOUD and W-CODE

Signal Sources and Devices

In this setup W-CODE and W-PCIe-LAN works together with a Software Defined Receiver (SDR) via its direct IF I/Q interface. It is also possible to use a universal Virtual Audio Cable (VAC) as interface. Additional hardware is not required for

this software only solution. The W-PCIe-LAN may even be replaced by a standard PC or workstation. Because data is digitally processed, any loss of decoding quality can be avoided.

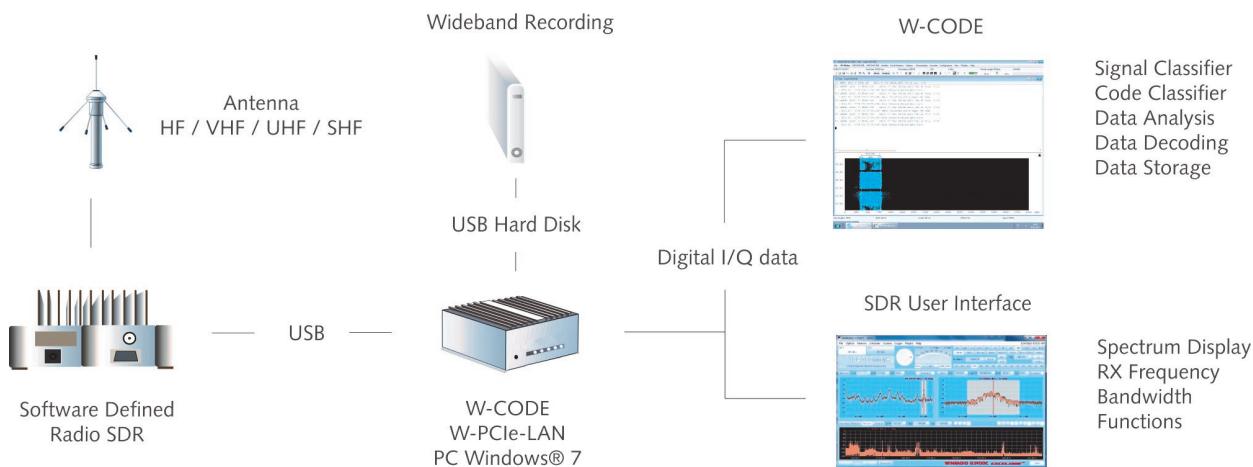


Satellite communication decoding is also possible using W-CODE and W-PCIe, W-PCI or W74PC. In this configuration the interface card

acts as a dual Direct Down Converter (DDC). The receiving frequency is automatically and directly controlled by W-CODE.




W-CODE and W-PCIe, W-PCI or W74PC supports all types of receivers with IFs from 8 kHz to 21.4 MHz and even wideband receivers with

70 MHz IF. It is also possible to use a sound card as an input device.

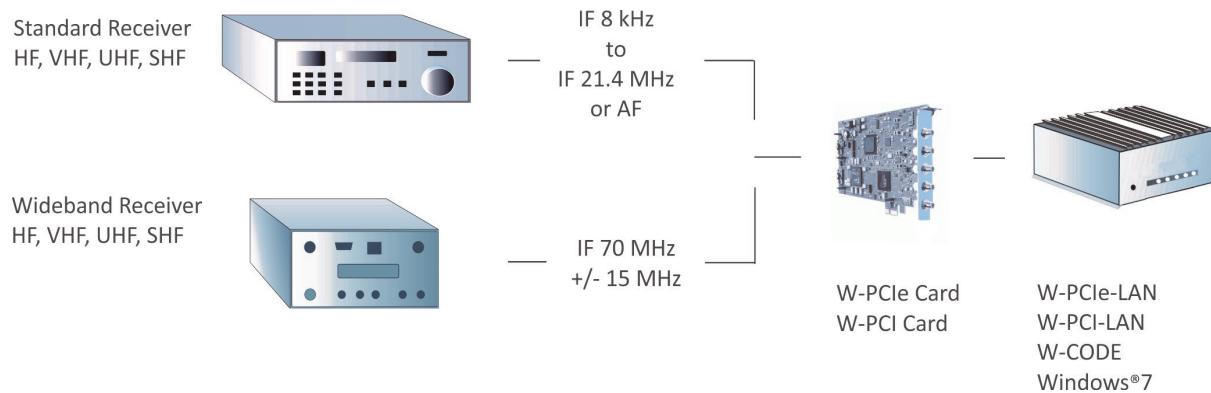


Wideband and Narrowband Recording

Example setup including a WiNRADiO G39DDC SDR for *wideband recording* of up to 4 MHz on a 3-4 TB hard disk via a standard USB 2.0 interface. Any off-the-shelf hard disk will do whether it is internal or connected via USB, LAN or WLAN.

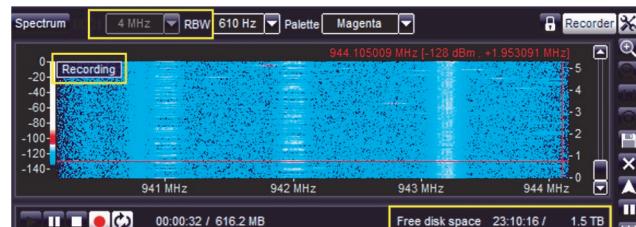

The W-CODE *Media Player/Recorder* records and saves signals from the selected input to digital I/Q WAV files. During playback of WAV files the signal is sent unprocessed to W-CODE and an audio signal is available for simultaneous monitoring. The Media Player/Recorder complements the rich analysis functions available in W-CODE.

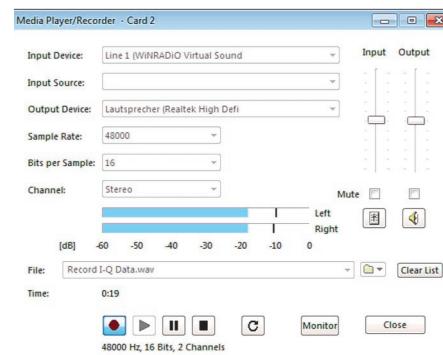

Automatic Spectrum Analysis, Classification and Decoding

Powerful analysis and classification unit

Automatic spectrum analysis and signal classification process is winning more and more importance nowadays. It can conduct spectrum monitoring both in wide range (bandwidth) and round the hour with great preciseness and efficiency. This space and time advantage outperforms clearly a human operator, although the later has certain skill and experience.

W-CODE signal classification tools include:

- ◆ W-Spectrum Analysis (SA)
- ◆ W-Classifier-NB (Narrowband)
- ◆ W-Classifier-WB (Wideband)

W-Spectrum Analysis (SA) can detect and measure all signals in a selected bandwidth with measuring parameters such as center (Hz), signal bandwidth (Hz), signal level (dB) and


detection confidence (in percent).

Each signal can further contain a number of sub-signals with their parameters again.


W-SA is integrated in FFT and FFT / Sonogram displays for all radio bands (HF, V/UHF, SAT etc). Detected signals are marked with their sub-signals and parameters.

Results of all detected signals and their sub-signals are delivered on the remote control interface (XML RCI) as well for third-party development.

Detected signals can be saved with their timestamp as a structured XML file for database compatible display and analysis.

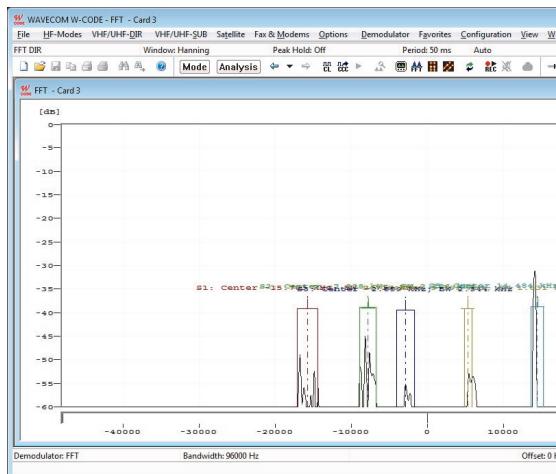

W-Spectrum Analysis detects 5 signals
in an HF band (96 kHz bandwidth)

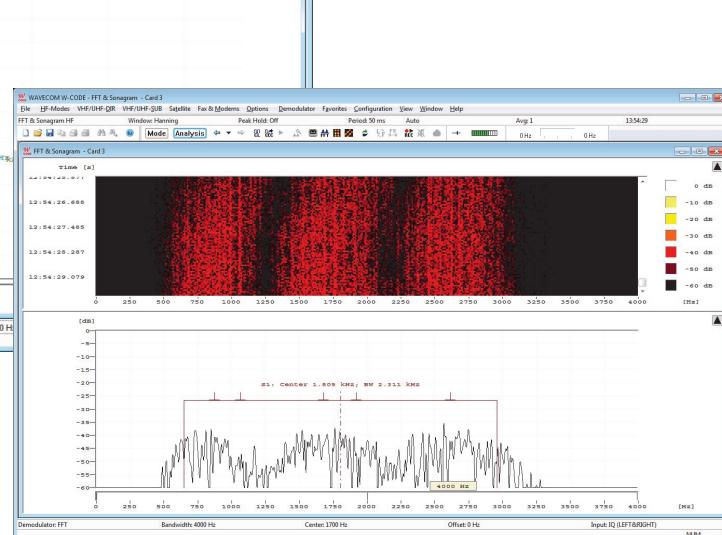

W-Spectrum Analysis detects one STANAG-4285 signal with its sub-signals, display bandwidth 4 kHz

Automatic Spectrum Analysis, Classification and Decoding

Powerful analysis and classification unit


W-Classifier measures a signal in its parameters:

- ◆ Modulation type
- ◆ Baud rate or symbol rate
- ◆ Signal center frequency
- ◆ Number of carriers
- ◆ Frequency shift
- ◆ Carrier spacing or distance
- ◆ CW-Morse detection
- ◆ 8 kHz bandwidth (W-Classifier-NB, WCL61PC)
- ◆ All signals within the classifier bandwidth

are processed

Additional functions for wideband classification (W-Classifier-WB)

- ◆ Bandwidth up to 96 kHz
- ◆ Voice detection AM, FM, USB and LSB
- ◆ Baud rates up to 60 kBd

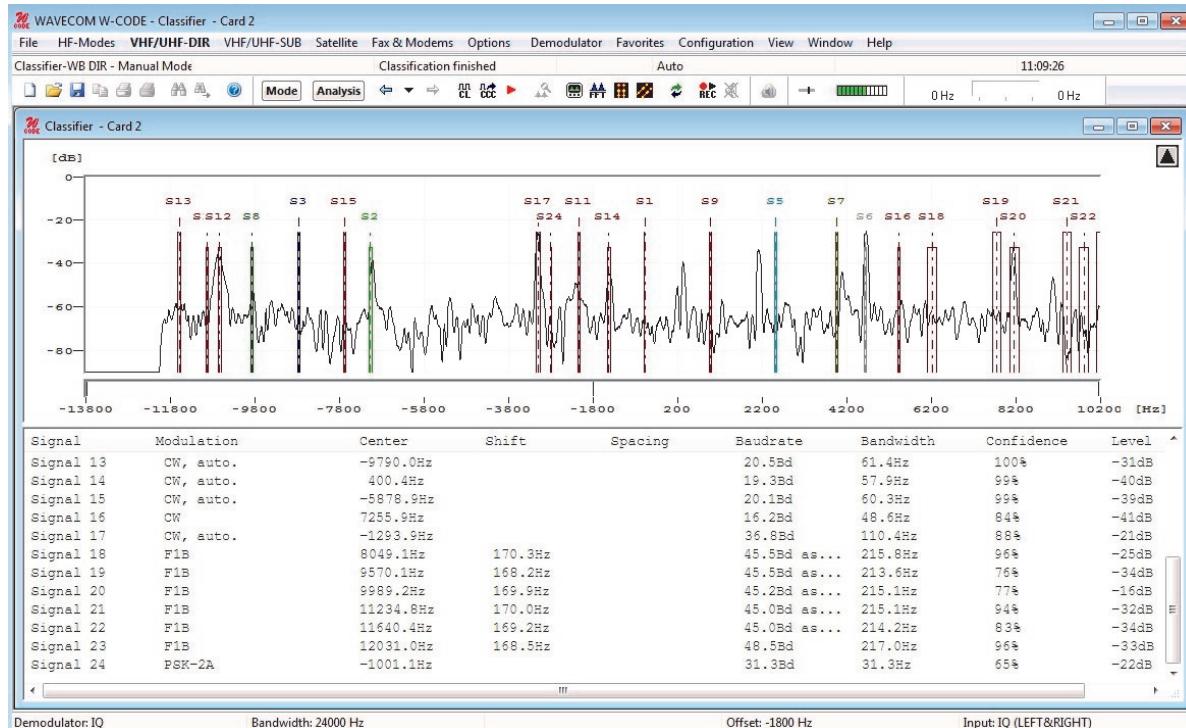


Wideband-Classifier display containing 24 identified signals


Automatic Spectrum Analysis, Classification and Decoding

Powerful analysis and classification unit


The Classifier also offers a number of signal visualising functions like symbol display, display of real and imaginary components of the analyzed signals, baud rate spectrum and differential symbol display in a phase plane. Signal parameters can also be measured manually.

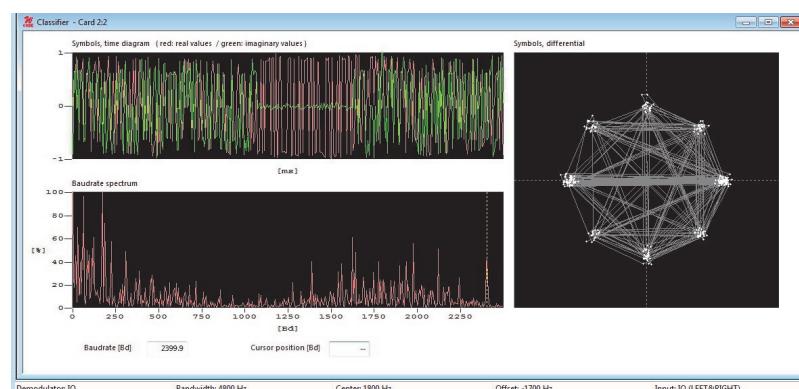

Classifier with 2,400 Baud 8-PSK STANAG-4285 HF signal

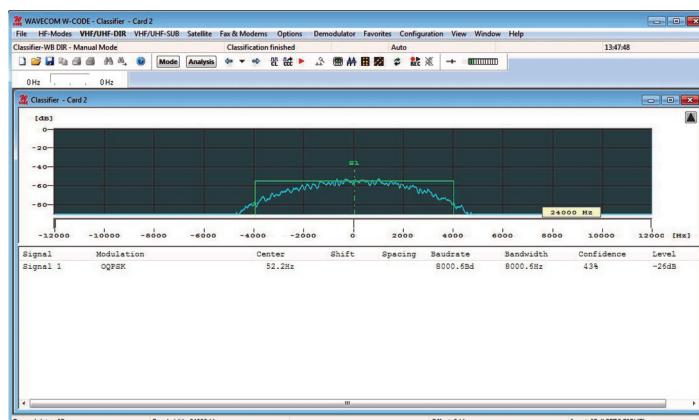

Analysis of an 8,000 Baud GMSK TETRAPOL signal

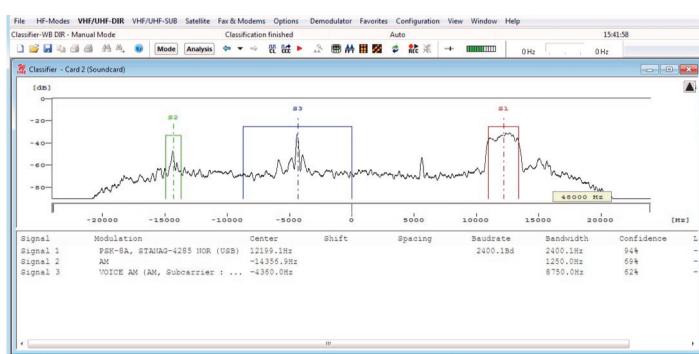


The monitored frequency band is displayed in a spectrum plane. After classification has completed, the classified signals are listed below the spectrum display.

Automatic Spectrum Analysis, Classification and Decoding

Powerful analysis and classification unit

The *Classifier-Code-Check CCC* is a versatile analysis tool for the classification of known and unknown signals and the determination of the mode in use. The CCC will attempt to process all signals within the bandwidth of the classifier. The classifier attempts to classify the input signals according to their modulation formats. The table check works through the signals against the entries of the selected mode list. The code check will attempt to synchronize against classified modes, finally the signal will be forwarded to a decoder for output.

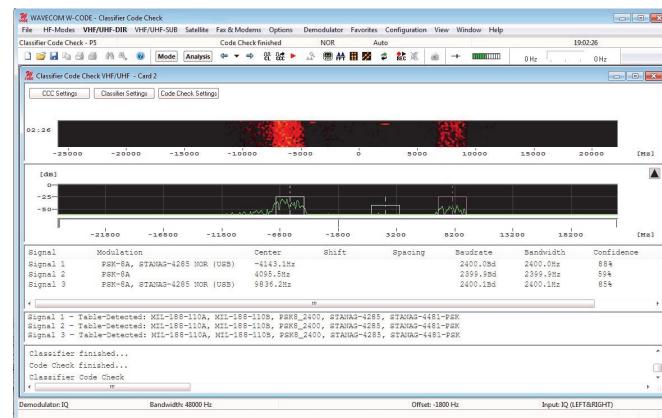

A *CCC Table Editor* allows extending, modifying or deleting records in the database used for mode look-up. An input template containing all important parameters is available for each modulation type. All parameters, the record name and the file name are user selectable.



Name	Decoder	Modulation	Subcarrier	Baud/Symbol...	Shift	Bandwidth	No. of Tones	No. of Carriers	Spacing	Pilot Frequency	Codecs
PSK-8-300	no-mode	FSK	800	500	*	2					5
PSK-8-145	no-mode	FSK	81.9	145	*	2					5
PSK-8L-145	no-mode	FSK	81.9	145	*	2					5
G-TOR	g-tor	FSK	100	170	*	2					2
G-TOR	g-tor	FSK	100	170	*	2					2
G-TOR	g-tor	FSK	200	200	*	2					2
G-TOR	g-tor	FSK	300	200	*	2					2
G-TOR	g-tor	FSK	300	170	*	2					2
G-TOR	g-tor	FSK	100	200	*	2					1
GW-OFDM/DC-HF	no-mode	PSK	100	170	*	2					5
GW-FSK	gw-fsk	FSK	100	200	*	2					5
GW-FSK	gw-fsk	FSK	200	200	*	2					5
GW-OFDM	gw-ofdm	OFDM	PSK-4	62.5			12 (min. 1)	62.5			5
GW-OFDM	gw-ofdm	OFDM	PSK-4	62.5			14 (min. 13)	62.5			5
GW-OFDM	gw-ofdm	OFDM	PSK-4	62.5			16 (min. 15)	62.5			5
GW-OFDM	gw-ofdm	OFDM	PSK-4	62.5			18 (min. 17)	62.5			5
GW-OFDM	gw-ofdm	OFDM	PSK-4	62.5			20 (min. 19)	62.5			5
GW-OFDM	gw-ofdm	OFDM	PSK-4	62.5			22 (min. 21)	62.5			5
GW-OFDM	gw-ofdm	OFDM	PSK-4	62.5			24 (min. 23)	62.5			5
GW-OFDM	gw-ofdm	OFDM	PSK-4	62.5			26 (min. 25)	62.5			5
GW-OFDM	gw-ofdm	OFDM	PSK-4	62.5			28 (min. 27)	62.5			5
GW-OFDM	gw-ofdm	OFDM	PSK-4	62.5			30 (min. 29)	62.5			5
GW-OFDM	gw-ofdm	OFDM	PSK-4	62.5			32 (min. 31)	62.5			5
GW-PSK	gw-psk	PSK-4	200								5
GW-PSK	gw-psk	PSK-8	200								5
HFC-Q2	hc-qng	FSK	240	200	*	2					5
HELL-40	hell-40	FSK	345	400	*	2					1
HF-ACARS	hf-acars	PSK-2	1800								2
HF-ACARS	hf-acars	PSK-4	1800								2
HF-ACARS	hf-acars	PSK-8	1800								2

The *Signal Parameters Editor* allows the entry of an unlimited number of transmission modes, protocols in an XML tables. Any table can be loaded from the Code-Check-Settings menu. Tables are composed according to their frequency range (HF, VHF/UHF DIR, VHF/UHF SUB or satellite).

Signal Parameters Editor			
Edit Signal:	<input type="radio"/> FSK <input type="radio"/> MFSK <input type="radio"/> PSK <input checked="" type="radio"/> OFDM <input type="radio"/> CW		
Name:	GW-OFDM	Subcarrier:	PSK-4
Decoder:	gw-ofdm	Symbol Rate:	62.5
Modulation:	OFDM	No. of Carriers:	16
Codecheck Count:	5	Minimum No. of Carriers:	15
<input type="checkbox"/> Recognition disabled		Bandwidth:	937
ITU Designator:		Spacing:	62.5
Comments:	Guard 2 ms	Pilot Frequency:	Hz
<input type="button" value="OK"/> <input type="button" value="Cancel"/>			

Decoders and Demodulators

The implementation of complex systems for monitoring is only limited by the number of decoders and the performance of the hardware and software. A wide range of system default settings can be configured, e.g., input signal level, measuring interval, center frequency and demodulator type. W-CODE contains more than 230 transmission modes, all available in a standard package, not requiring any additional license.

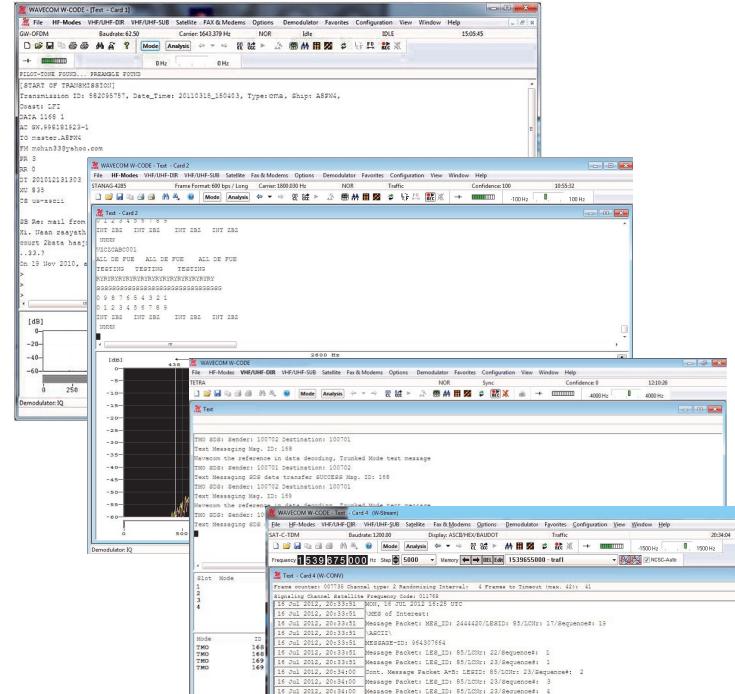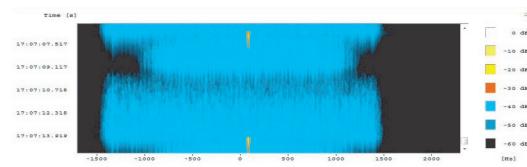

Decoded GW-OFDM from HF

Decoded STANAG-4285 from HF


TETRA decoded from UHF

Decoded satellite SAT-C-TDM transmission

*Live examples of decoding are available as flash movies at
<http://www.wavecom.ch/product-presentation.php>*

Measurement and Analysis


The determination of signal characteristics is assisted by a large number of analysis and measurement functions. The numerous integrated analysis tools contain several different methods and visualization options for HF, VHF, UHF, SHF and satellite emissions. The GUI assists the operator in analyzing the important signal parameters. Dynamic zoom functions allow magnification of details in any selected window and the scroll buffering feature makes it possible to move backward and forward in time over the input signal.

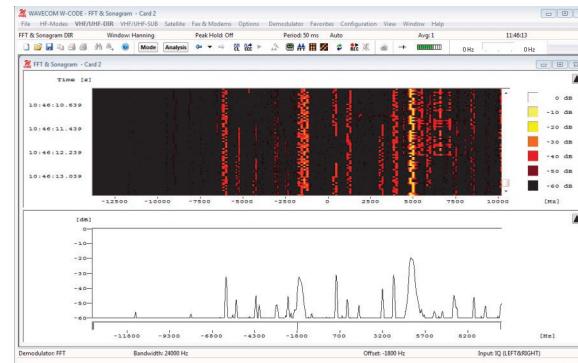


Sonagram and FFT spectrum display

FFT
Sonagram
FFT & Sonagram
Waterfall
Osilloscope
FSK Analysis
FSK Code Check
PSK Symbol Rate
PSK Phase Plane
PSK Code Check
MIL-STANAG Code Check
MFSK Analysis
MFSK Code Check
Classifier
Classifier Code Check
Autocorrelation
Bit Correlation
Bit Length Analysis
Demodulated Bit Stream

Some analysis tools

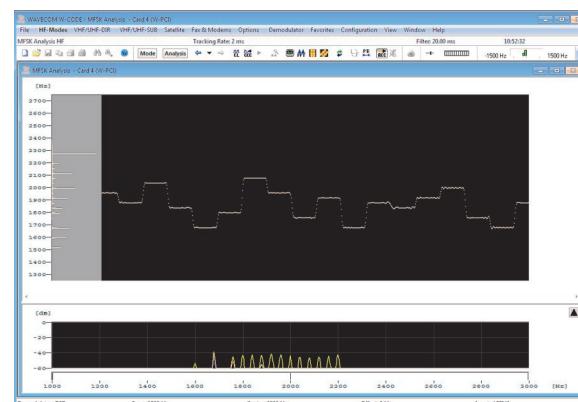

MFSK analysis with tone measurement, graphical display and FFT

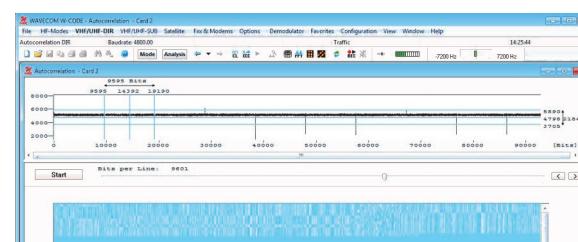


Signal correlating at 9600 bits

Simultaneous Processing of Multiple Signals


W-CODE allows up to eight simultaneous instances and inputs on the same host PC or workstation. The instances are completely independent. DDC or SDR may provide the input signal, additional hardware is not required. W-CODE license is measured on its decoding capacity. Each instance occupies a license when running.

An advantageous “Workstation License” with a proper number of licenses can be configured on one single license carrier (USB dongle). This can be plugged in a PC, all W-CODE instances in a same network can capture licenses from the license carrier in a first come-first serve fashion.

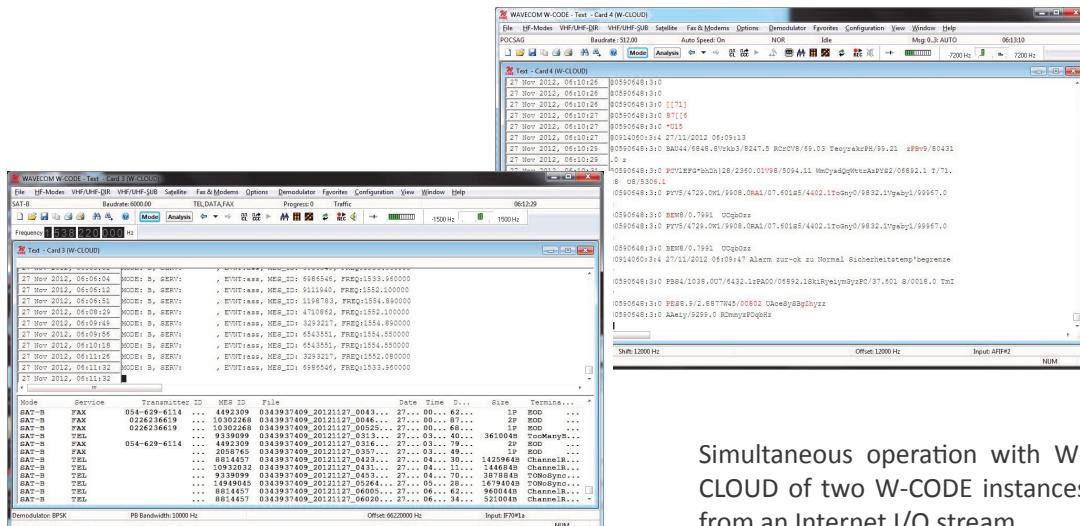

Simultaneous operation with W-CLOUD of two W-CODE instances from an Internet I/Q stream.

Simultaneous decoding and symbol rate analysis using two W-CODE instances. This setup can be further expanded as required. W-PCI and W-PCIe also allow two inputs with complete DDC functionality. Software Defined Radio SDR multi-input is available since Software V9.0.00.

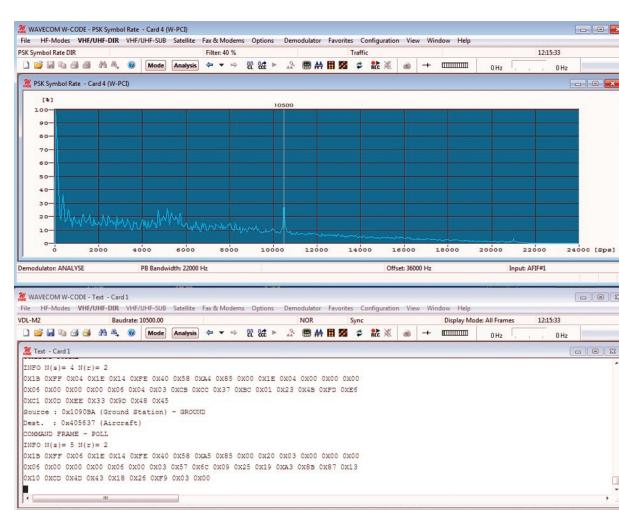

HF - Protocols

ALE-400	EFR	POL-ARQ
ALF-RDS	FEC-A	PRESS-FAX
ALIS	FELDHELL	PSK-10
ALIS-2	FM-HELL	PSK-125 (BPSK, QPSK) with FLARC
ARQ6-90	FT8	PSK-125F
ARQ6-98	GMDSS/DSC-HF	PSK-220F
ARQ-E	G-TOR	PSK-250 (BPSK, QPSK) with FLARC
ARQ-E3	GW-FSK	PSK-31 (BPSK, QPSK)
ARQ-M2-242	GW-OFDM	PSK-31-FEC
ARQ-M2-342	GW-PSK	PSK-63 (BPSK, QPSK) with FLARC
ARQ-M4-242	HC-ARQ	PSK-63F
ARQ-M4-342	HF-ACARS (HF-DL)	PSK-AM
ARQ-N	HNG-FEC	ROBUST-PACKET
ASCII	ICAO-SELCAL (ANNEX 10)	RUM-FEC
AUM-13	LINK-11 (CLEW)	SI-ARQ
AUTOSPEC	MD-674	SI-AUTO
BAUDOT	MFSK-16	SI-FEC
BR-6028 (ITA-2 and ITA-5)	MFSK-20	SITOR-ARQ
BULG-ASCII	MFSK-8	SITOR-AUTO
CHN 4+4	MIL-188-110-16TONE (-110A/B App. A)	SITOR-FEC
CHU	MIL-188-110-39TONE (-110A/B App. B)	SP-14
CIS-11	MIL-188-110A Serial Tones, 75-4800 bps	SPREAD-11, 21, 51
CIS-12 (HEX output)	MIL-188-110A-MOD	SSTV Automatic
CIS-14	MIL-188-110B (App. C) STANAG 4539	SSTV Martin 1, 2, 3, 4
CIS-36	MIL-188-110B 3200-12800 bps	SSTV Robot 8s, 12s, 24s, 36s
CIS-36-50	MIL-188-141A (ALE)	SSTV SC-1 16, 32s
CIS-50-50	MIL-188-141B (BW0, BW1, BW4 data)	SSTV SC-1 8s, 16s, 32s
CLOVER-2 (ARQ, all CRCs)	MIL-188-141B (BW2, BW3 ID)	SSTV Scottie 1, 2, 3, 4
CLOVER-2000 (ARQ, all CRCs)	MIL-M-55529 NB/WB	SSTV Wraase SC-1 24s - 96s
CLOVER-2500	OLIVIA	SSTV Wraase SC-2 20s - 180s
CODAN-CHIRP	PACKET-300/600	STANAG 4285 75-3600 bps
CODAN-SELCAL	PACTOR (all CRCs)	STANAG 4415 75 bps (NATO ROBUST)
CODAN-3212	PACTOR-FEC (all CRCs)	STANAG 4481-FSK (KG-84)
CODAN-9001	PACTOR-II (all CRCs)	STANAG 4481-PSK
COQUELET-8	PACTOR-II-AUTO (all CRCs)	STANAG 4529 75-1800 bps
COQUELET-13	PACTOR-II-FEC (all CRCs)	STANAG 4539 3200-12800 bps
COQUELET-80	PACTOR-III (all CRCs)	STANAG 5065-FSK
CV-786	PACTOR-4	SWED-ARQ
CW-MORSE	PICCOLO-MK12	THROB
DCS SELCAL	PICCOLO-MK6	THROBX
DGPS		TWINPLEX
DUP-ARQ		VISEL
DUP-ARQ-2		WEATHER-FAX
DUP-FEC-2		

VHF/UHF - Protocols

ACARS
AIS
APCO-25 (P25, with live voice)
ASCII
ATIS (Selcal digital)
BIIS
CCIR-1 (Selcal analog)
CCIR-2 (Selcal analog)
CCIR-7 (Selcal analog)
CCITT (Selcal analog)
CTCSS
DCS-SELCAL
DGPS
DMR (with live voice)
dPMR (with live voice)
DTMF (Selcal analog)
DZVEI (Selcal analog)

EEA (Selcal analog)
EIA (Selcal analog)
ERMES
EURO (Selcal analog)
FLEX
FMS-BOS (Selcal digital)
GMDSS/DSC-VHF
GOLAY/GSC
MOBITEX-1200 (with OVLS)
MOBITEX-8000
MODAT (Selcal analog)
MPT-1327 (with ITA-5)
NATEL (Selcal analog)
NMT-450
NWR-SAME
NXDN (with live voice)
PACKET-1200

PACKET-9600
PCCIR (Selcal analog)
PDZVEI (Selcal analog)
POCSAG
PZVEI (Selcal analog)
SKYPER (POCSAG)
TETRA (with live voice)
TETRAPOL (with live voice)
VDEW (Selcal analog)
VDL-M2
X.25
ZVEI-1 (Selcal analog)
ZVEI-2 (Selcal analog)
ZVEI-3 (Selcal analog)
ZVEI-VDEW (Selcal digital)

SATELLITE - Protocols

AMSAT-P3-D
INMARSAT-AERO-P (L-band)
INMARSAT-AERO-C (L-band)
INMARSAT-AERO-R (C-band)
INMARSAT-AERO-T (C-band)
INMARSAT-B-C-TFC (return)
INMARSAT-B-Data (forward)
INMARSAT-B-FAX (forward)
INMARSAT-B-HSD (forward, high speed data)

INMARSAT-B-TEL (forward, with live voice)
INMARSAT-B-TELEX-MM (forward)
INMARSAT-B-TELEX-SM (forward)
INMARSAT-C-EGC (Enhanced Group Call)
INMARSAT-C-TDM
INMARSAT-C-TDM-EGC
INMARSAT-C-TDMA
INMARSAT-M-DATA (forward)
INMARSAT-M-FAX (forward)

INMARSAT-M-TEL (forward, with live voice)
INMARSAT-mM-DATA (forward)
INMARSAT-mM-FAX (forward)
INMARSAT-mM-TEL (forward)
INMARSAT-mM-HSD (High Speed Data)
INMARSAT-mM-C-HSD (C band High Speed Data)
NOAA-GEO SAT
ORBCOMM

FAX-G3 and MODEM - Protocols

FAX-G3_T4 / T6 / JPEG / JBIG T.30 protocol with ECMM
FAX-G3-V.17
FAX-G3-V.27ter
FAX-G3-V.29
FAX-G3-V.34hdx

BELL103
BELL212A
V.21
V.22 / V.22bis
V.23

V.26 / V.26bis
V.32 / V.32bis
V.34 / V.34bis
V.90
V.92

Alphabets

Chinese (7-bit ASCII)
HEX
ITA-1 Latin
ITA-2 Baghdad70 Arabic
ITA-2 Baghdad80 Arabic
ITA-2 Cyrillic
ITA-2 Danish-Norwegian
ITA-2 Hebrew
ITA-2 Latin
ITA-2 Latin Transparent

ITA-2 Swedish
ITA-2 TASS Cyrillic
ITA-2 Third Shift Cyrillic
ITA-2 Third Shift Greek
ITA-5 Bulgarian
ITA-5 Danish-Norwegian
ITA-5 French
ITA-5 German
ITA-5 Swedish
ITA-5 US

Morse Arabic
Morse Cyrillic
Morse Greek
Morse Hebrew
Morse Latin
Morse Scandinavian
Morse Spanish
User defined 5-bit alphabets based on UNICODE

Demodulators

AM for METEOSAT and NOAA-GEOSAT FAX transmissions
BPSK, 10-12000 symbols/s
CTCSS
CW Morse, 10-500 WPM, Center frequency 0.5 kHz-3.5 kHz, Bandwidth 100 Hz-1.2 kHz, AFC On/Off
DPSK, DBPSK, DQPSK, D8PSK, D16PSK, 10-12000 symbols/s
DTMF
DXPSK, dual carrier adaptive modulation, 2DPSK-D16PSK, 100 Baud
FAX-G3-V.17, FAX-G3-V.27ter, FAX-G3-V.29 FAX-G3-V.34hdx
BELL103, BELL212A, V.21, V.22/V22bis, V.23 V.26/V26bis, V.32/V.32bis, V.34, V.90, V.92

FFSK, 10-12000 Baud, Shift 50 Hz-16 kHz
FSK, 10-2400 Baud, Shift 50 Hz-3.5 kHz Center frequency 0.5 kHz-3.5 kHz
GFSK, 10-12000 Baud, Shift 50 Hz-16 kHz
Mark-Space FSK, 10-300 Baud, Shift 50 Hz-3.5 kHz Center frequency 0.5 kHz-3.5 kHz
MFSK, Tone length 4-1000 ms, max. 64 Tones Shift 50 Hz-3.5 kHz
OFDM, 12-32 carriers, DQPSK, 62.5 symbols/s
OQPSK, 10-12000 symbols/s
QPSK, 10-12000 symbols/s
Software AM demodulator for VHF/UHF SUB IF inputs
Software FM demodulator for VHF/UHF SUB IF inputs

Classifier Code Check (CCC) with look-up table and XML-editor for all modulation variants

Process Steps	P1	Only classification is performed, but no decoding
	P2	Classification and table check are performed, but no decoding
	P3	Classification, table check and code check are performed, but no decoding
	P4	Classification and table check are performed and finally the signal is decoded if a mode with an associated, valid detector was found
	P5	Classification, table check and code check are performed and finally the signal is decoded if a mode with an associated, valid detector was found

Analysis Functions

Autocorrelation up to 200.000 bits	MFSK analysis graphical display of MFSK tone spectrum with histogram
Automatic analysis and decoding software for all data and FAX-G3 modulation types	Phase plane analysis HF BPSK, QPSK, OQPSK, DPSK and I/Q 10-2400 Baud
Automatic CRC recognition of all PACTOR-II and PACTOR-II -FEC systems	Phase plane analysis VHF/UHF-DIR BPSK, DPSK, QPSK and OQPSK 100-12000 Baud
Automatic message type detection (ITA-2, ITA-5 and sync/async), LSB/MSB for STANAG and MIL-STD modes	Phase plane analysis VHF/UHF-SUB BPSK, QPSK, OQPSK, DPSK and I/Q 50-4000 Baud
Bit correlation analysis. Raw FSK analysis - graphical display of demodulated data on a raster time line. For visual recognition of character and block lengths	Real-time FFT, averaging: 1-64 values, bandwidth 0.5, 1, 2, 4, 24, 48 kHz and 96 kHz and adjustable cursors, 20 frames/sec
Bit length analysis. Graphical display of demodulated data, with automatic calculation of bit length and bit pattern display	Sonogram and FFT tuning display
Code check for PSK, FSK, MFSK and MIL-STANAG modes	Sonogram, real-time display with cursor functions and history (full scrolling)
Manual measurement of the frequency shift(s) with movable cursors	Sound card calibration tool
Oscilloscope, real time, resolution up to 200 us/div	Graphical data display for selcal signal analysis
	Waterfall, real-time display with cursor functions

Overall Software Characteristics

Media Player/Recorder, recording and playback of signals	SERIAL LINK, serial data output to PC serial interface COM 1 - 16
ALARM MONITOR, automatically detected text-string saving to HD or network SMS output	STANAG5066 parser in MIL-STD and STANAG codes
Automatic insertion of time stamps (in 1 ms)	TCP/IP direct data (IQ and PCM) interface for streaming and for digital receivers (PXGF, IP-CONF, VITA-49)
Synchronized PSK and FSK raw bitstream available through remote control interface	TCP/IP remote control with Wavecom GUI, full functionality over LAN or Internet (encrypted and speed optimized)
File formats TXT, JPG, BMP, Unicode, WAVECOM (with timestamps)	Unlimited scroll-back buffers for text and graphics
PSK, FSK and MFSK baudrate history display with full graphical recall, averaging and cursor functions	Up to 8 decoders may be installed on one host PC
FSK shift history display with graphical recall, averaging and cursor functions	WiNRadio VSC and Virtual Audio Cable (VAC) support
Configurable message type for most MIL-STD and STANAG codes	Sound card input, 8-bit and 16-bit, 8 kHz to 192 kHz, stereo and mono left/right
Pass-band filters in most modes	License on a USB dongle or SD card
Pass-band tuning in FFT display in most modes	WAV files playback and decoding, loop mode
	XML Remote Control Interface API for C++ and C#, XML over TCP/IP

Since more than thirty years Wavecom Elektronik AG has developed, manufactured and distributed high quality devices and software for the decoding and retrieval of information from wireless data communication in all frequency bands. The nature

of the data communication may be arbitrary, but commonly contains text, images and voice. The company is internationally established within this industry and maintains a longstanding, world-wide network of distributors and business partners.

Product Information

Products	http://www.wavecom.ch/product-summary.php
Datasheets	http://www.wavecom.ch/brochures.php
Specifications	http://www.wavecom.ch/product-specifications.php
Documentation	http://www.wavecom.ch/manuals.php
Online help	http://www.wavecom.ch/content/ext/DecoderOnlineHelp/default.htm
Software warranty	One year free releases and bug fixes, update by DVD
Hardware warranty	Two years hardware warranty
Prices	http://www.wavecom.ch/contact-us.php

System Requirements and Ordering Information

	<i>Minimum</i>	<i>Recommended</i>
CPU	P4 Dual-Core 2.4 GHz	Core i5 or Core i7 2.8 GHz
Memory	2 GB RAM	4 - 8 GB RAM
OS	Windows XP	Windows 7 32-bit or Windows 7 64-bit

Product Code	Description
WCODE	Standard decoder software for all products. Client and server (floating) license
WLV	Vocoder live voice output to the speaker. Option for W-CODE, W74PC, W-PCIe, W-PCI and W-SPECTRA

Distributors and Regional Contacts

You will find a list of distributors and regional contacts at <http://www.wavecom.ch/distributors.php>